

Car transporter

Single axle - AA116/3518 and AA118/3518



Discover the exceptional comfort and effortless loading of a Tohaco air-suspended trailer

The Tohaco single axle car transporter is the top model for those who choose the highest quality and maximum safety when transporting compact cars or large motorcycles. Among other uses, it is ideal for towing behind a motorhome. Its air suspension system automatically adjusts to weight of the load, ensuring optimal driving characteristics for outstanding comfort, stability and safety on the road. With simple controls, the loading platform can be lowered completely to the ground, allowing fast, safe and effortless loading and unloading, without the need for ramps. The fully automatic air-suspension system is integrated beneath the loading floor and features a high-quality compressor, high-capacity battery, two air bellows, two shock absorbers and automatic level control. The air suspension system requires a fully wired 13-pin car plug to operate. With a technical maximum mass of 1600 kg or 1800 kg.

Optional equipment specifically for car transport:

- Remote control for completely independent loading and unloading of cars.
- Air tank to reach ride height or exit height even faster.
- Perforated steel floor suitable for wheel chocks and straps over the wheels.

Tohaco air suspended trailers

Extremely comfortable

Easy and safe loading and unloading

No ramps required

Extremely safe and stable driving

Low centre of gravity

Very low ramp angle




Proven technology

Made in the Netherlands



Scan the QR code for more information.



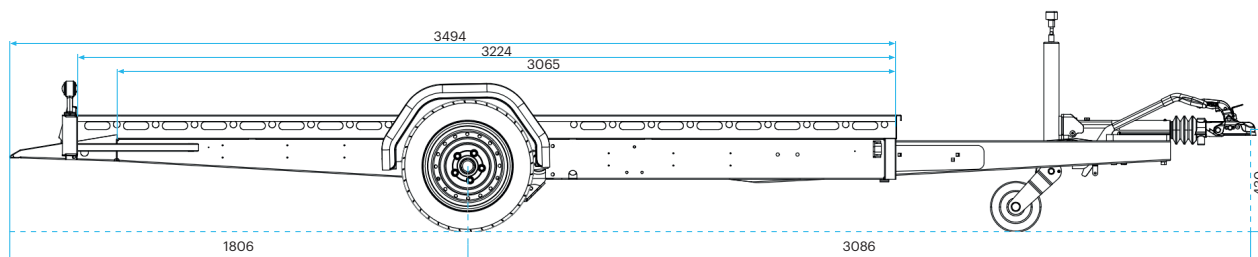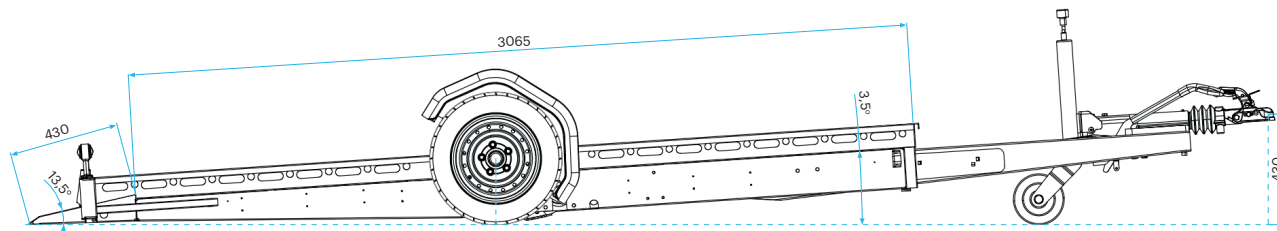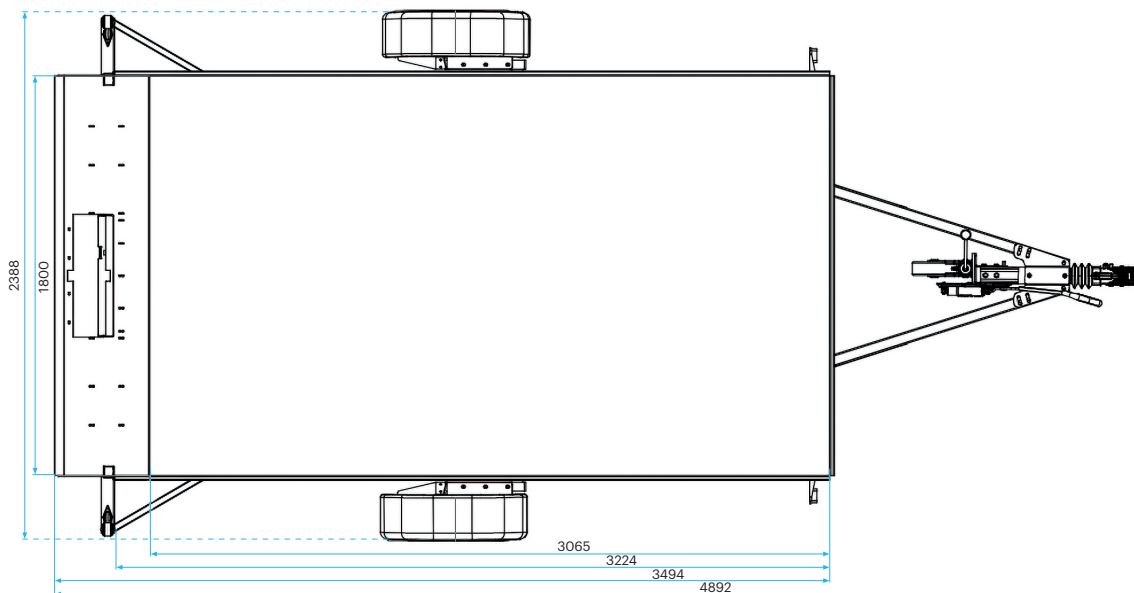

Technical Specifications	AA116/3518	AA118/3518
Overall length x width	4892 x 2388 mm	
Loading floor length x width	3494 x 1800 mm	
Technical maximum mass	1600 kg	1800 kg
Unladen weight (standard configuration)	483 kg	500 kg
Load capacity (depending on equipment)	1117 kg	1300 kg
Connector	Fully wired 13-pin Jaeger required	
Air suspension system	Electronic with automatic level control	
Compressor box contents	12V, 18-bar compressor with air dryer, valve block, relay and ASCU (Air Suspension Control Unit)	
Air tank	None, optional 5 litres	
Battery	12V, 75Ah AGM semi traction	
Battery charging features	Battery monitor, charging connector for external charger, built-in 10A DC-DC charger via 13-pin connector	
Lowering protection	Mechanical safety device preventing unintended lowering of the loading floor	
Emergency valves	2, left and right	
Chassis	Fully welded, hot-dip galvanized	
Lashing options	Binding rail front, left and right (optional with centre binding rail, 2-piece floor)	
License plate holder	Foldable and equipped with LED lighting	
Wheel suspension - 1 axle	Independent, air suspension, 2 air bellows, 2 shock absorbers	
Wheel size - tire size	13" 6J ET30 5x112 - 195/50R13C	
Brakes	Knott, mechanical	
Loading floor	18 mm birch plywood with anti-slip coating, single piece (various other flooring options available)	
Jockey wheel	Automatic retracting, galvanized, with solid rubber wheel	