

Car transporter

Single axle - AA116/3518eco and AA118/3518eco



Discover the exceptional comfort and effortless loading of a Tohaco air-suspended trailer

The Tohaco single-axle eco car transporter is the basic model for anyone who prioritizes comfort, ease of loading and maximum safety when transporting large motorbikes or a cross buggy, for example. Among other uses, it is ideal for towing behind a motorhome. Thanks to its air suspension, the trailer has the same optimal driving characteristics with every load, making it exceptionally comfortable, stable and safe to drive. The release valve allows you to lower the loading floor completely to the ground. This makes loading and unloading easy and safe, without the need for ramps.

The trailer can be lifted using a portable compressor via the filling valve. For example, with the Makita air pump in the options list or a standard tyre pump. The height indicators next to the mudguards accurately indicate the correct driving height. Any weight difference between the left and right sides can be easily corrected using two twist taps.

With a technical maximum mass of 1600 kg or 1800 kg.

- For fully independent loading and unloading of cars, the fully automatic air suspension system with optional remote control is the right choice.

Tohaco air suspended trailers

Extremely comfortable

Easy and safe loading and unloading

No ramps required

Extremely safe and stable driving

Low centre of gravity

Very low ramp angle




Proven technology

Made in the Netherlands



Scan the QR code for more information.



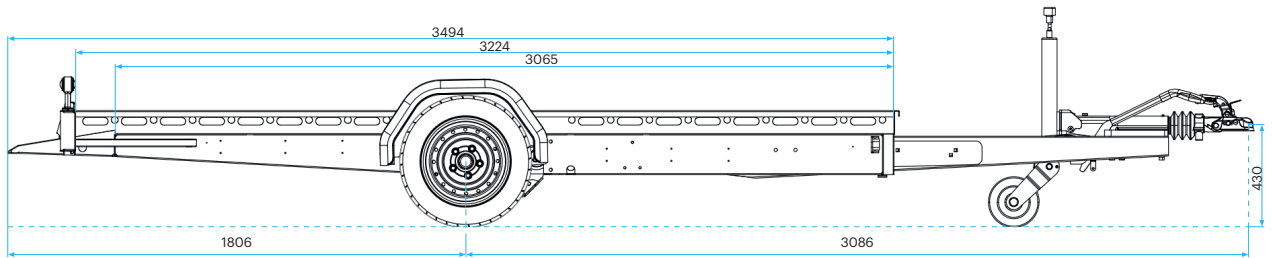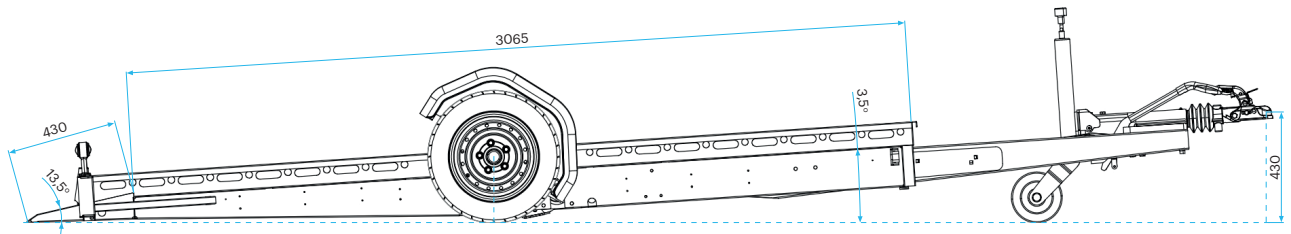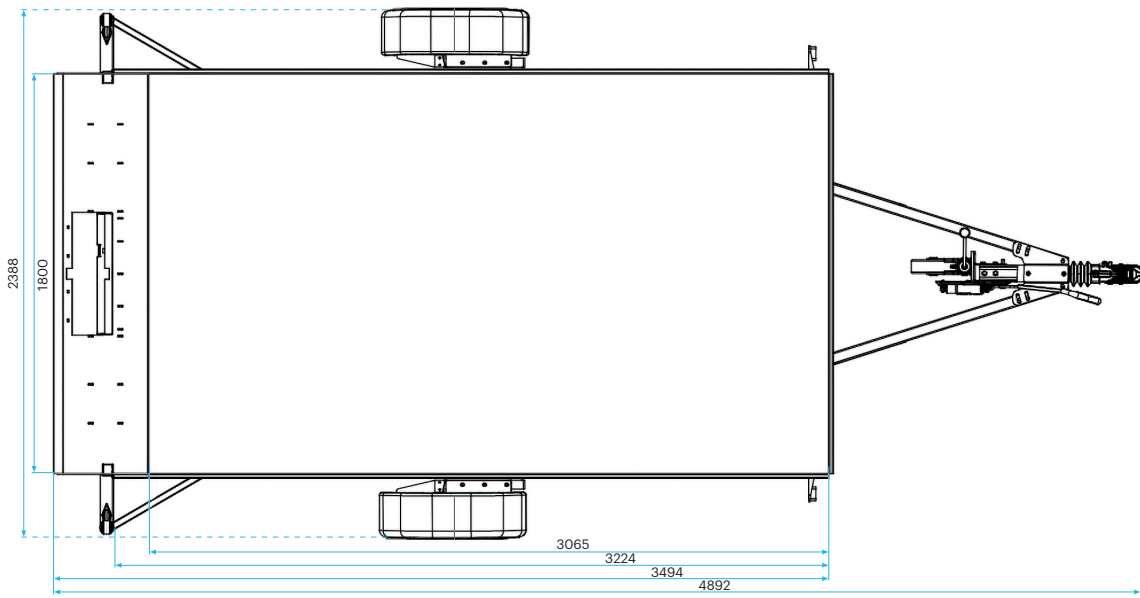

Technical Specifications	AA116/3518eco	AA118/3518eco
Overall length x width	4892 x 2388 mm	
Loading floor length x width	3494 x 1800 mm	
Technical maximum mass	1600 kg	1800 kg
Unladen weight (standard configuration)	453 kg	470 kg
Load capacity (depending on equipment)	1147 kg	1330 kg
Connector	13-pin Jaeger	
Air suspension system	With external air source, e.g. portable compressor, manual height adjustment	
Lowering protection	Mechanical safety device preventing unintended lowering of the loading floor	
Chassis	Fully welded, hot-dip galvanized	
Lashing options	Binding rail front, left and right (optional with centre binding rail, 2-piece floor)	
License plate holder	Foldable and equipped with LED lighting	
Wheel suspension - 1 axle	Independent, air suspension, 2 air bellows, 2 shock absorbers	
Wheel size - tire size	13" 6J ET30 5x112 - 195/50R13C	
Brakes	Knott, mechanical	
Loading floor	18 mm birch plywood with anti-slip coating, single piece (various other flooring options available)	
Jockey wheel	Automatic retracting, galvanized, with solid rubber wheel	